


# Balflex® Hydraulic Quick Couplings




## Balflex® HPA Screw Couplings

screw couplings for very high pressure hydraulic systems



40.V013 - Male

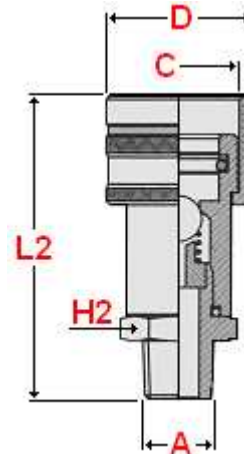

40.V114 - Female



Type **ENERPAC**

**Materials:** carbon steel body, zinc plated

**Threads:** NPT

**Valve closure detail:** ball

**Maximum operating temperature:** + 120°C / + 248°F (other materials for higher temperatures as special features)

**Minimum operating temperature:** - 20°C / - 4°F (other materials for lower temperatures as special features)

**Application:** very high pressure hydraulic lines of industrial equipment

part number male	part number female	nominal size A		working pressure		dimensions (mm)						
		mm	inch	bar	PSI	B	H1	L1	C	D	H2	L2
40.V013.04	40.V114.04	6	1/4"	700	10 000	16	27	39	16	30	19	67
40.V013.06	40.V114.06	10	3/8"	700	10 000	19	32	39	19	35	24	74

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

**Balflex® – The European Technology**