




Balfit[®] SAE Flanged Connections

Balfit[®] 3000 PSI Flanged Head for Weld-On BSP Pipe – 88.3200

carbon steel flanged head for 3000 PSI (code 61) hydraulic lines, with weld-on connection for BSP pipe

Balfit[®] 6000 PSI Flanged Head for Weld-On BSP Pipe – 88.6200

carbon steel flanged head for 6000 PSI (code 62) hydraulic lines, with weld-on connection for BSP pipe

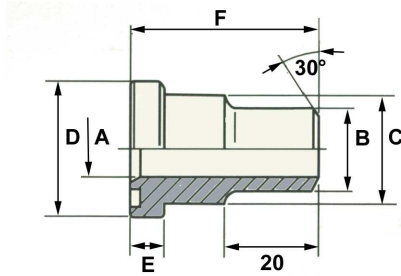

According to **ISO 6162** According to **SAE J518**

Material: Forged carbon steel
Finish: Zinc-plated

Part Number	Nominal Size	Working Pressure	Dimensions (mm)					
	inch		A	B (GAS)	C	D	E	F
88.3200.08	1/2	345	13	1/2	24	30	7	41
88.3200.12	3/4	345	19	3/4	32	38	7	50
88.3200.16	1	345	25	1	38	44	8	50
88.3200.20	1.1/4	276	32	1.1/4	43	51	8	55
88.3200.24	1.1/2	207	38	1.1/2	50	60	8	57
88.3200.32	2	207	51	2	51	71	10	57
88.6200.08	1/2	414	13	1/2	24	32	8	34
88.6200.12	3/4	414	19	3/4	32	41	9	38
88.6200.16	1	414	25	1	38	48	10	40
88.6200.20	1.1/4	414	32	1.1/4	44	54	10	45
88.6200.24	1.1/2	414	38	1.1/2	51	64	13	50
88.6200.32	2	414	51	2	67	79	13	58

also available:

Balfit[®] Stainless Steel Flanged Head for Weld-On BSP Pipe

(add an "S" at the end of the part number: ex: 88.3200.08 S)

Balfit[®] Flanged Head for Weld-On Metric Pipe

(change to 1 the third digit of the part number: ex: 88.3210.08; also available in stainless steel)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.