

Balfit® SAE Flanged Connections




Balfit® 3000 PSI Flanged Head with BSPT Thread – 88.3230

carbon steel flanged head for 3000 PSI (code 61) hydraulic lines, with BSP taper male thread connection

Balfit® 6000 PSI Flanged Head with BSPT Thread – 88.6230

carbon steel flanged head for 6000 PSI (code 62) hydraulic lines, with BSP taper male thread connection

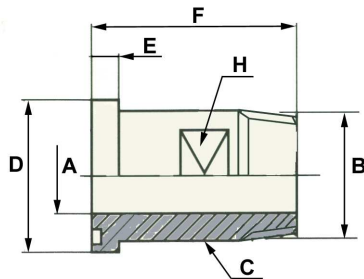

According to **ISO 6162** According to **SAE J518**

Material: Forged carbon steel
Finish: Zinc-plated

Part Number	Nominal Size	Working Pressure	Dimensions (mm)						
	inch		A	B (BSPT)	C	D	E	F	H (flat)
88.3230.08	1/2	345	12	1/2	24	30	7	50	19
88.3230.12	3/4	345	17	3/4	32	38	7	55	27
88.3230.16	1	345	22	1	38	44	8	60	32
88.3230.20	1.1/4	276	27	1.1/4	43	51	8	65	41
88.3230.24	1.1/2	207	32	1.1/2	50	60	8	70	46
88.3230.32	2	207	40	2	62	71	10	75	55
88.6230.08	1/2	414	12	1/2	24	32	8	50	19
88.6230.12	3/4	414	17	3/4	32	41	9	60	26
88.6230.16	1	414	22	1	38	48	10	70	32
88.6230.20	1.1/4	414	27	1.1/4	44	54	10	75	36
88.6230.24	1.1/2	414	32	1.1/2	51	63	13	80	41
88.6230.32	2	414	40	2	67	79	13	90	55

also available:

Balfit® Stainless Steel Flanged Head with BSPT Thread

(add an "S" at the end of the part number: ex: 88.3230.08 S)

Balfit® Flanged Head with Metric Thread

(change to 4 the third digit of the part number: ex: 88.3240.08; also available in stainless steel)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

Balflex® – The European Technology