




Balfit® Compression Ring Pipe Fittings

Balfit® Straight Reducing Connector – 34.141.

carbon steel Metric thread straight reducing 24° compression ring standpipe connector

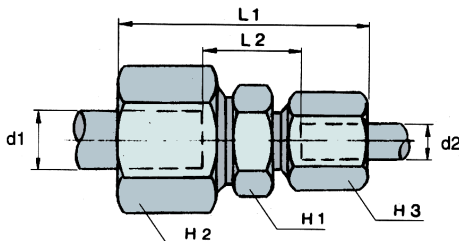

According to **ISO 8434-1** According to **DIN 2353**

Material: Carbon Steel

Finish: Zinc-plated

part number	Ø tube		dimensions						working pressure MPa	ISO series
	d1	d2	L1	L2	H1	H2	H3			
34.141.0806L	8	6	40,5	11	14	17	14	31.5	L	
34.141.1006L	10	6	41,5	12	17	19	14	31.5	L	
34.141.1008L	10	8	42	12	17	19	17	31.5	L	
34.141.1206L	12	6	42	13	19	22	14	31.5	L	
34.141.1208L	12	8	42,5	13	19	22	17	31.5	L	
34.141.1210L	12	10	43,5	14	19	22	19	31.5	L	
34.141.1510L	15	10	45	15	24	27	19	31.5	L	
34.141.1512L	15	12	44,5	15	24	27	22	31.5	L	
34.141.1810L	18	10	47	15,5	27	32	19	31.5	L	
34.141.1812L	18	12	46,5	15,5	27	32	22	31.5	L	
34.141.1815L	18	15	48	16,5	27	32	27	16.0	L	
34.141.1812L	22	12	48,5	17,5	32	36	22	31.5	L	
34.141.2215L	22	15	50	18,5	32	36	27	16.0	L	
34.141.2218L	22	18	51	18	32	36	32	16.0	L	
34.141.2818L	28	18	52	19	41	41	32	16.0	L	
34.141.2822L	28	22	54	21	41	41	36	16.0	L	
34.141.3522L	35	22	59	21	46	50	36	16.0	L	
34.141.3528L	35	28	59	21	46	50	41	16.0	L	
34.141.0806S	8	6	48	18	17	19	17	63.0	S	
34.141.1006S	10	6	48,5	17,5	19	22	17	63.0	S	
34.141.1008S	10	8	48,5	17,5	19	22	19	63.0	S	
34.141.1206S	12	6	50,5	19,5	22	24	17	63.0	S	

also available:

Balfit® Stainless Steel 24° Compression Ring

(add an 'S' at the end of the part number; ex: 34.141.1206L)

continued on next page

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

Balflex® – The European Technology


Balfit® Compression Ring Pipe Fittings



continued

Balfit® Straight Reducing Connector – 34.141.

carbon steel Metric thread straight reducing 24° compression ring standpipe connector

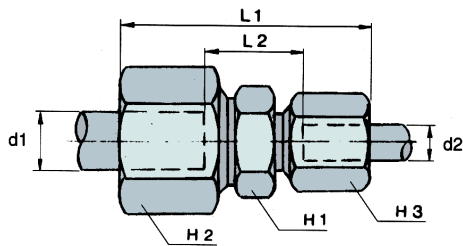

According to **ISO 8434-1** According to **DIN 2353**

Material: Carbon Steel

Finish: Zinc-plated

part number	Ø tube		dimensions						working pressure MPa	ISO series
	d1	d2	L1	L2	H1	H2	H3			
34.141.1208S	12	8	50,5	19,5	22	24	19	63.0	S	
34.141.1210S	12	10	51	19	22	24	22	63.0	S	
34.141.1410S	14	10	54,5	20,5	24	27	22	63.0	S	
34.141.1412S	14	12	54,5	20,5	24	27	24	63.0	S	
34.141.1612S	16	12	54,5	20	27	30	24	40.0	S	
34.141.1614S	16	14	58	21,5	27	30	27	40.0	S	
34.141.2010S	20	10	59,5	22	32	36	22	40.0	S	
34.141.2012S	20	12	59,5	22	32	36	24	40.0	S	
34.141.2016S	20	16	63	23	32	36	30	40.0	S	
34.141.2516S	25	16	68	25,5	41	46	30	40.0	S	
34.141.2520S	25	20	71	25,5	41	46	36	40.0	S	
34.141.3020S	30	20	74	26	46	50	36	40.0	S	
34.141.3025S	30	25	77	26,5	46	50	46	40.0	S	
34.141.3830S	38	30	87	29,5	55	60	50	31.5	S	

also available:

Balfit® Stainless Steel 24° Compression Ring

(add an 'S' at the end of the part number; ex: 34.141.1208S)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

Balflex® – The European Technology