




# Balfit® Compression Ring Pipe Fittings

## Balfit® Welding Bulkhead Connector – 34.156.

carbon steel weld-on bulkhead 24° compression ring standpipe connector

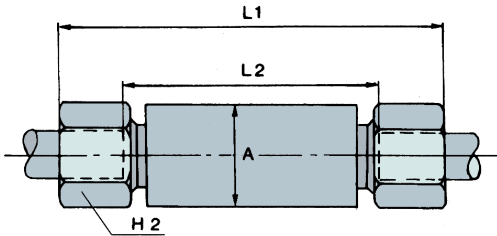

According to **ISO 8434-1** According to **DIN 2353**

**Material:** Carbon Steel  
**Finish:** Zinc-plated

part number	Ø tube	thread	dimensions							working pressure	ISO series
	mm		A	L1	L2	H2				MPa	
34.156.06L	6		18	85	56	14				31.5	L
34.156.08L	8		20	85	56	17				31.5	L
34.156.10L	10		22	87	58	19				31.5	L
34.156.12L	12		25	87	58	22				31.5	L
34.156.15L	15		28	100	70	27				31.5	L
34.156.18L	18		32	101	69	32				31.5	L
34.156.22L	22		36	105	73	36				16.0	L
34.156.28L	28		40	106	73	41				16.0	L
34.156.35L	35		50	114	71	50				16.0	L
34.156.42L	42		60	115	70	60				16.0	L
34.156.06S	6		20	89	60	17				63.0	S
34.156.08S	8		22	89	60	19				63.0	S
34.156.10S	10		25	91	59	22				63.0	S
34.156.12S	12		28	91	59	24				63.0	S
34.156.14S	14		30	107	72	27				63.0	S
34.156.16S	16		35	107	71	30				40.0	S
34.156.20S	20		38	114	71	36				40.0	S
34.156.25S	25		45	120	72	46				40.0	S
34.156.30S	30		50	126	73	50				40.0	S
34.156.38S	38		60	133	72	60				31.5	S

also available:

## Balfit® Stainless Steel 24° Compression Ring

(add an 'S' at the end of the part number; ex: 34.156.16S)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

**Balflex® – The European Technology**