




Balfit[®] Compression Ring Pipe Fittings

Balfit[®] Blanking Plug – 34.158.

carbon steel plug with O-ring groove

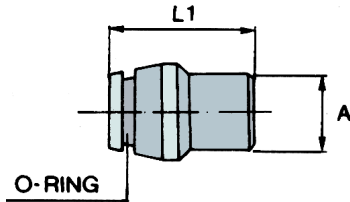

According to **ISO 8434-1** According to **DIN 2353**

Material: Carbon Steel

Finish: Zinc-plated

part number	Ø tube	thread	dimensions							working pressure	ISO series
	mm		A	L1			O-ring		MPa		
34.158.06LS	6	6	17				4x1,5		31.5	L	
34.158.08LS	8	8	17				6x1,5		31.5	L	
34.158.10LS	10	10	20				7,5x1,5		31.5	L	
34.158.12LS	12	12	21				9x1,5		31.5	L	
34.158.15L	15	15	21				12x2		31.5	L	
34.158.18L	18	18	23				15x2		31.5	L	
34.158.22L	22	22	23				20x2		16.0	L	
34.158.28L	28	28	25				26x2		16.0	L	
34.158.35L	35	35	29				32x2,5		16.0	L	
34.158.42L	42	42	30				38x2,5		16.0	L	
34.158.14S	14	14	23				10x2		63.0	S	
34.158.16S	16	16	24				12x2		40.0	S	
34.158.20S	20	20	28				16,3x2,4		40.0	S	
34.158.25S	25	25	31				20,3x2,4		40.0	S	
34.158.30S	30	30	34				25,3x2,4		40.0	S	
34.158.38S	38	38	38				33,3x2,4		31.5	S	

also available:

Balfit[®] Stainless Steel 24° Compression Ring

(add an 'S' at the end of the part number; ex: 34.158.16S)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

Balflex[®] – The European Technology