


# Balflex® BAL-OQ / Oils and Chemicals



## Balflex® BAL – OQ SUCTION & DELIVERY – 12.9010.

### Flexible Hose of PVC Reinforced with Spiral

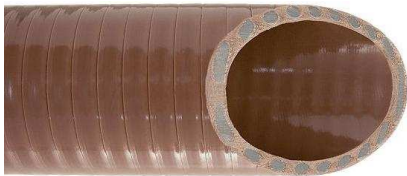

- Inner tube :** PVC, highly flexible, resistant to abrasion, weather and UV rays
- Internal surface :** smooth, passage facilitator
- Reinforcement :** high resistant PVC spiral
- Color :** brown
- Coil lenght :** 25 / 50 meters
- Safety factor :** 2.5 : 1
- Temperature range :** - 10°C (+14°F) + 55°C (+ 131°F)
- Application :** suction and discharge services of oil, gasoline, diesel, fuels and huge variety of chemical products or formulations

| part number | Ø nom. | dash size | Ø internal  | Ø external  | working pressure | min. burst pressure | vacuum | coils   |
|-------------|--------|-----------|-------------|-------------|------------------|---------------------|--------|---------|
|             |        |           | mm          | mm          | PSI              | PSI                 | PSI    | Mts     |
| 12.9010.025 | 1"     | - 25      | 25,0 ± 0,5  | 32,0 ± 1,0  | 144              | 360                 | 15     | 25 / 50 |
| 12.9010.032 | 1.1/4" | - 32      | 32,0 ± 0,5  | 39,0 ± 1,0  | 132              | 330                 | 15     | 25 / 50 |
| 12.9010.038 | 1.1/2" | - 38      | 38,0 ± 0,5  | 47,0 ± 1,0  | 120              | 300                 | 15     | 25 / 50 |
| 12.9010.050 | 2"     | - 50      | 50,0 ± 1,0  | 60,0 ± 1,0  | 120              | 300                 | 15     | 25 / 50 |
| 12.9010.063 | 2.1/2" | - 63      | 63,0 ± 1,0  | 73,0 ± 1,5  | 108              | 270                 | 15     | 25 / 50 |
| 12.9010.075 | 3"     | - 75      | 75,0 ± 1,0  | 86,0 ± 1,5  | 108              | 270                 | 15     | 25 / 50 |
| 12.9010.100 | 4"     | - 100     | 101,0 ± 1,0 | 114,0 ± 1,5 | 96               | 240                 | 15     | 25 / 50 |

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

**Balflex® – The European Technology**