


Balfit® Hydraulic Adapters



Balfit® BSP Bulkhead Connector – 52.5003

carbon steel BSP Bulkhead Connector

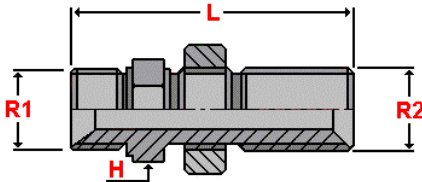

According to **ISO 8434-6**

Material: Carbon Steel, zinc plated

| part number | working pressure | thread | | L mm | H mm |
|-------------|------------------|-----------|-----------|---------|---------|
| | bar | R1 | R2 | | |
| 52.5003.04 | 350 | 1/4" – 19 | 1/4" – 19 | 46 | 19 |
| 52.5003.06 | 250 | 3/8" – 19 | 3/8" – 19 | 54 | 22 |
| 52.5003.08 | 225 | 1/2" – 14 | 1/2" – 14 | 57 | 27 |
| 52.5003.12 | 200 | 3/4" – 14 | 3/4" – 14 | 65 | 32 |
| 52.5003.16 | 160 | 1" – 11 | 1" – 11 | 73 | 38 |


also available:

Balfit® Stainless Steel BSP Bulkhead Connector

(add an 'S' at the end of the part number; ex: 52.5003.06 S)

Balfit® BSP Locknut – 52.5004

(carbon steel BSP Locknut)



According to **ISO 8434-6**

Material: Carbon Steel, zinc plated

| part number | working pressure | thread | H mm |
|-------------|------------------|-----------|---------|
| | bar | | |
| 52.5004.04 | 350 | 1/4" – 19 | 19 |
| 52.5004.06 | 250 | 3/8" – 19 | 22 |
| 52.5004.08 | 225 | 1/2" – 14 | 27 |
| 52.5004.12 | 200 | 3/4" – 14 | 32 |
| 52.5004.16 | 160 | 1" – 11 | 38 |

also available:

Balfit® Stainless Steel BSP Locknut

(add an 'S' at the end of the part number; ex: 52.5004.06 S)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

Balflex® – The European Technology