

Balfit® SAE Flanged Connections



Balfit® 3000 PSI Split Flange Clamp w/ Threaded Holes


88.3110 / 88.3120

carbon steel split flange clamp (uncut), for 3000 PSI (code 61) hydraulic lines, with Metric (88.3110) or UNF (88.3120) threaded holes

Balfit® 6000 PSI Split Flange Clamp w/ Threaded Holes

88.6110 / 88.6120

carbon steel split flange clamp (uncut), for 6000 PSI (code 62) hydraulic lines, with Metric (88.6110) or UNF (88.6120) threaded holes

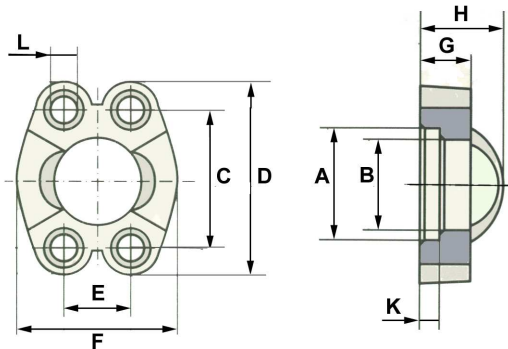

According to **ISO 6162** According to **SAE J518**

Material: Forged carbon steel
Finish: Zinc-plated

Part Number	Nominal Size	Working Pressure	Dimensions (mm)									Threaded holes L for part numbers	
	inch		bar	A	B	C	D	E	F	G	H	K	88.-110
88.31-0.08	1/2	345	31	24	38	54	17	46	13	19	6	M8	5/16
88.31-0.12	3/4	345	39	32	48	65	22	52	14	22	6	M10	3/8
88.31-0.16	1	345	45	38	52	70	26	58	16	24	7	M10	3/8
88.31-0.20	1.1/4	276	52	44	59	79	30	73	14	22	7	M10	7/16
88.31-0.24	1.1/2	207	61	51	70	94	36	82	16	25	7	M12	1/2
88.31-0.32	2	207	72	63	78	102	43	96	16	26	9	M12	1/2
88.31-0.40	2-1/2	172	85	75	89	114	51	108	19	38	9	M12	1/2
88.61-0.08	1/2	420	33	25	41	56	18	47	16	22	7	M8	5/16
88.61-0.12	3/4	420	42	33	51	71	24	60	19	28	8	M10	3/8
88.61-0.16	1	420	48	39	57	81	28	70	24	33	9	M12	7/16
88.61-0.20	1.1/4	420	55	44	67	95	32	77	27	38	10	M14	1/2
88.61-0.24	1.1/2	420	64	52	79	113	37	95	30	43	12	M16	5/8
88.61-0.32	2	420	80	68	97	133	44	114	37	52	12	M20	3/4

also available:

Balfit® Stainless Steel Split Flange Clamp w/ Threaded Holes

(add an "S" at the end of the part number: ex: 88.3110.08 S)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.