


Balfit® Compression Ring Pipe Fittings



Balfit® Reducing Branch Tee – 34.145.

carbon steel reducing branch tee 24° compression ring standpipe connector

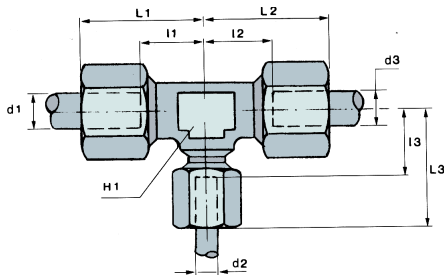

According to **ISO 8434-1** According to **DIN 2353**

Material: Carbon Steel
Finish: Zinc-plated

part number	Ø tube			dimensions							working pressure	ISO series
	d1	d2	d3	L1	L2	L3	I1	I2	I3	H1	MPa	
34.145.0806L	6	8	6	22	29	22	12	11,5	12	12	31,5	L
34.145.0608L	8	6	8	29	29	29	14	11	9,5	12	31,5	L
34.145.1006L	6	10	6	30	30	29	15	11	15	14	31,5	L
34.145.1008L	8	10	8	30	30	30	15	15	15	14	31,5	L
34.145.0610L	10	6	10	29	30	29	14	15	14	14	31,5	L
34.145.0810L	10	8	10	29	30	29	14	15	14	14	31,5	L
34.145.1208L	8	12	8	32	29	32	17	14	17	17	31,5	L
34.145.0612L	12	6	12	32	32	29	17	17	14	17	31,5	L
34.145.0812L	12	8	12	32	31	32	17	16	17	17	31,5	L
34.145.1012L	12	10	12	32	31	32	17	16	17	17	31,5	L
34.145.1510L	10	15	10	36	36	36	21	21	21	19	31,5	L
34.145.0512L	12	15	12	36	36	36	21	21	21	19	31,5	L
34.145.0615L	15	6	15	35	36	35	20	21	20	19	31,5	L
34.145.1015L	15	10	15	35	36	35	20	21	20	19	31,5	L
34.145.1215L	15	12	15	36	35	36	21	20	21	19	31,5	L
34.145.1812L	12	18	12	39	35	40	24	20	23,5	24	31,5	L
34.145.1018L	18	10	18	38	40	38	23	23,5	23	24	31,5	L
34.145.1218L	18	12	18	40	38	38	23,5	23	23	24	31,5	L
34.145.1518L	18	15	18	40	38	40	23,5	23	23,5	24	31,5	L
34.145.1022L	22	10	22	44	39	40	27,5	24	23,5	27	16,0	L
34.145.1222L	22	12	22	44	40	38	27,5	23,5	3	27	16,0	L
34.145.1522L	22	15	22	44	41	44	27,5	26	27,5	27	16,0	L

also available:

Balfit® Stainless Steel 24° Compression Ring

(add an 'S' at the end of the part number; ex: 34.145.0812L)

continued on next page

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

Balflex® – The European Technology




Balfit® Compression Ring Pipe Fittings

continued

Balfit® Reducing Branch Tee – 34.145.

carbon steel reducing branch tee 24° compression ring standpipe connector

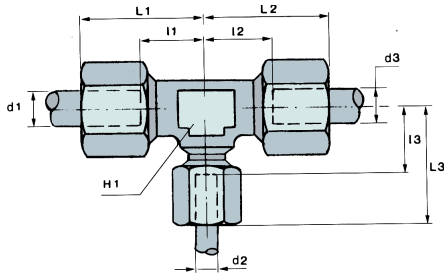

According to ISO 8434-1 According to DIN 2353

Material: Carbon Steel

Finish: Zinc-plated

part number	Ø tube			dimensions							working pressure MPa	ISO series
	d1	d2	d3	L1	L2	L3	I1	I2	I3	H1		
34.145.1822L	22	18	22	44	42	44	27,5	27	27,5	27	16.0	L
34.145.1028L	28	10	28	47	43	46	30,5	26,5	31	36	16.0	L
34.145.1228L	28	12	28	47	47	43	30,5	30,5	26,5	36	16.0	L
34.145.1528L	28	15	28	47	44	47	30,5	29	30,5	36	16.0	L
34.145.1828L	28	18	28	47	44	47	30,5	29	30,5	36	16.0	L
34.145.2228L	28	22	28	47	46	47	30,5	29,5	30,5	36	16.0	L
34.145.0610S	10	6	10	34	33	34	17,5	18	17,5	17	31.5	S
34.145.0812S	12	8	12	38	33	38	21,5	18	21,5	19	31.5	S
34.145.1012S	12	10	12	38	34	38	21,5	17,5	21,5	19	31.5	S
34.145.1612S	12	16	12	40	43	40	23,5	24,5	23,5	24	40.0	S
34.145.0616S	16	6	16	43	39	43	24,5	24	24,5	24	40.0	S
34.145.0816S	16	8	16	43	39	43	24,5	24	24,5	24	40.0	S
34.145.1016S	16	10	16	43	40	43	24,5	23,5	24,5	24	40.0	S
34.145.1216S	16	12	16	43	40	43	24,5	23,5	24,5	24	40.0	S
34.145.2016S	16	20	16	46	48	46	27,5	26,5	27,5	27	40.0	S
34.145.1020S	20	10	20	48	43	48	26,5	26,5	26,5	27	40.0	S
34.145.1220S	20	12	20	48	43	48	26,5	26,5	26,5	27	40.0	S
34.145.1620S	20	16	20	48	46	48	26,5	27	26,5	27	40.0	S
34.145.2520S	20	25	20	51	54	51	29,5	30	29,5	36	40.0	S
34.145.1625S	25	16	25	54	49	54	30	30,5	30	36	40.0	S
34.145.2025S	25	20	25	54	51	54	30	29,5	30	36	40.0	S
34.145.3025S	25	30	25	59	62	59	35	35,5	35	41	40.0	S

also available:

Balfit® Stainless Steel 24° Compression Ring

(add an 'S' at the end of the part number; ex: 34.145.1822L)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

Balflex® – The European Technology